



Glowform

spec sheet

Key features

Tailored: Custom made to any shape with laser cut technology for perfect accuracy.

LED: Wide range of light outputs, colour temperatures and colours.

Control: Switched, 0-10/1-10v, DALI, DMX and SPI dimming protocols.

Material: Acrylic diffuser with anodised aluminium baseplate.

Aesthetic: Even illumination of any shape with minimal depth requirement (36mm).

Longevity: 50,000+ LED lifetime expectancy.

Sustainability: Maintainable LED modules.

Application: Interior and exterior signage, branding and decorative lighting.

Glowform by The Light Lab



Glowform

the light lab
bright ideas

Product Details Glowform



Specification

Output	SO
Power Consumption	average 180W/m ²
Voltage	12VDC
IP Rating	IP40 or IP65
LED Colour ¹	2.7K/3.0K/4.0K/5.0K, RGBW or WWCW (White Mix 2.7K - 6.5K)
Dimensions:	
Width	2000mm (max)
Length	3000mm (max)
Depth ²	36mm
Mount Type ³	Wall (WA) or (Ceiling (CE)
Control	0-10V/1-10V/DMX/DALI/SPI

Notes

- 1 Other colours available on request
- 2 For integration into a bespoke profile, please contact the team
- 3 Special mechanical consideration is required for ceiling applications.

Order code

Glowform-IP Rating-LED Colour-Mount Type-Max Length x Max Width(mm) -Dimming


Example Code: Glowform-IP40-3.0K-WA-1200x300-DALI

Description: Glowform, IP40, 12VDC constant voltage LED with 3000K colour temperature. Surface wall mounted.

Overall dimensions = 1200x300mm. DALI dimmable.




X Section

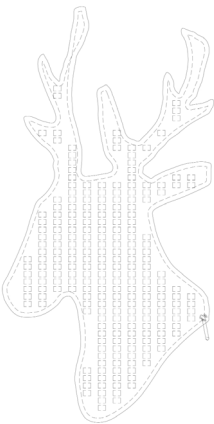

X Section



Mount Type - Wall


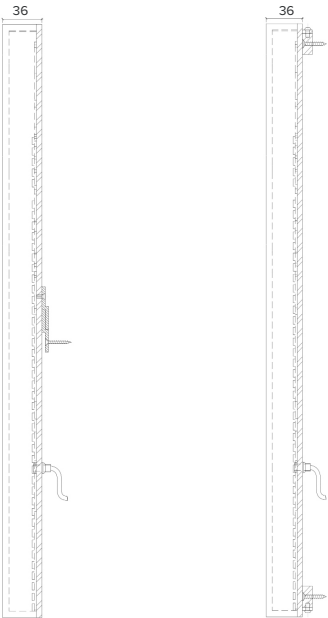


The Light Lab
22 Holywell Row
London EC2A 4JB
+44 (0) 207 278 2678
@thelightlabltd
www.thelightlab.com

the light lab
bright ideas



SUSHISAMBA, London

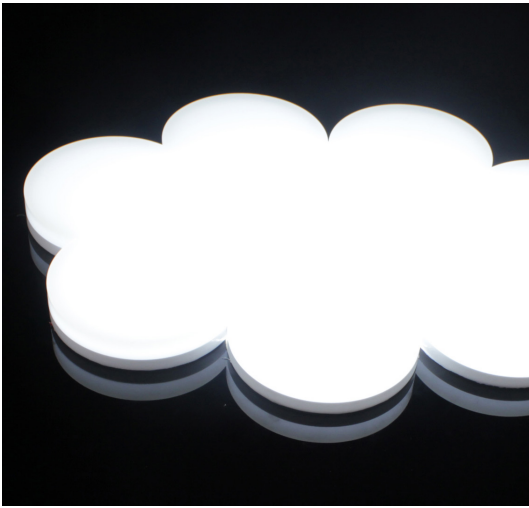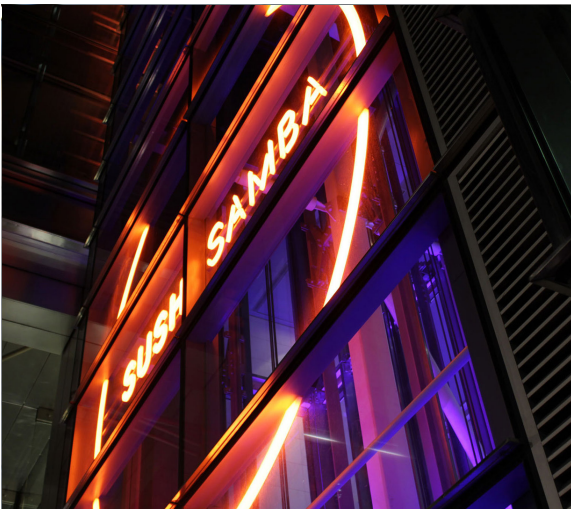

Bespoke Office Feature



Bespoke signage