Project: Hiscox, York

Lighting Designer: Chapman BDSP


Architect: MAKE

BAM // Leather sub-contractor: Harcourt Design **Contractor:**

Project Description


- Hellical curved handrail to follow curvature of concrete upstands 100m in total
- light to be continuous, to curve and returns
- illumination to 150 lux on stairs with 3 hour emergency back up
- handrails clad in leather finish


Install drawings

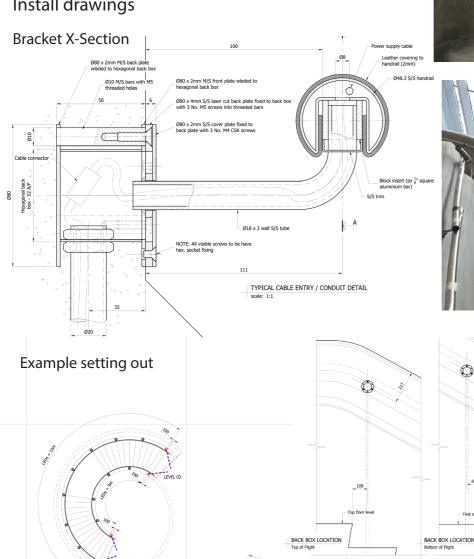


CHANGE IN CONC. LEVEL BELOW RAISED FLOOR

Install photos

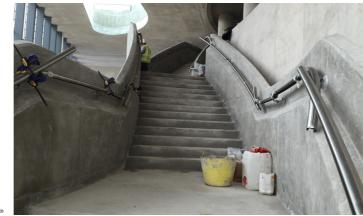










Project Images

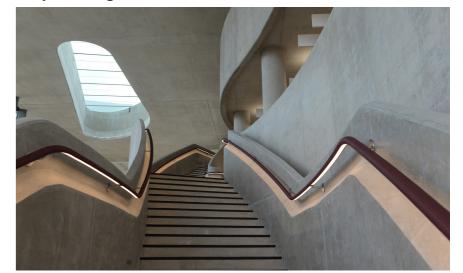





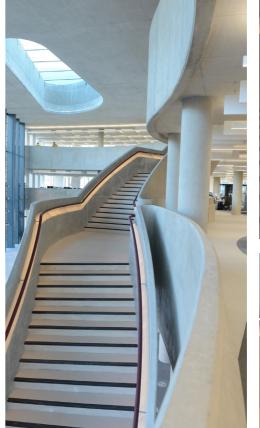



Date complete: Nov 2015



Glowrail Specification

Colour temp: 3.0K Total power: 14W/m

incl. diffuser

Lumen output: 1155 lm/m LED Efficiency: 82.5 lm/W The Light Lab 22 Holywell Row London EC2A 4JB **United Kingdom**

+44 (0) 207 278 2678 www.thelightlab.com

Company Reg. No: 4406351 Reg. Office: 22 Holywell Row, London EC2A 4JB

