

Product Details Glowpanel Trimless 35



Specification

| Output | SO | HO |
|-------------------------|--|----------------------------|
| Power Consumption | average 56W/m ² | average 76W/m ² |
| Voltage | 24VDC | 24VDC |
| IP Rating | IP40 or IP65 | IP40 or IP65 |
| LED Colour ¹ | 2.0K/3.0K/4.0K/5.0K, RGBW or WWCW (White Mix 2.7K - 6.5K) | |
| Dimensions: | 1500mm (max) | |
| Width | 3000mm (max) | |
| Length | 35mm | |
| Depth ² | | |
| Mount Type ³ | Surface (SM), Recessed Wall (RE), Wall (WA) or Ceiling (CE) | |
| Finish | White (WH) or Custom RAL (RAL) | |
| Control | 0-10V/1-10V/DMX/DALI/SPI | |

Notes

- 1 Other colours available on request.
- 2 Depth excludes grommet, glands & cables.
- 3 Special mechanical consideration is required for ceiling applications.

Order code

Glowpanel Trimless 35- Output-IP Rating-LED Colour-Mount Type-Frame Finish- Length x Width(mm)- Dimming


Example code: Glowpanel Trimless 35-SO-IP40-3.0K-SM-BR-1200x300-DALI

Description: Glowpanel Trimless 35, standard output, IP40, 24VDC constant voltage LED with 3000K colour temperature. Surface mounted with powder coated chassis. Overall dimensions = 1200x3000 mm. DALI dimmable.




X Section


IP40

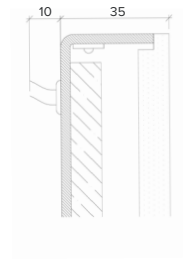


IP65



Wall Fixing



Ceiling Fixing

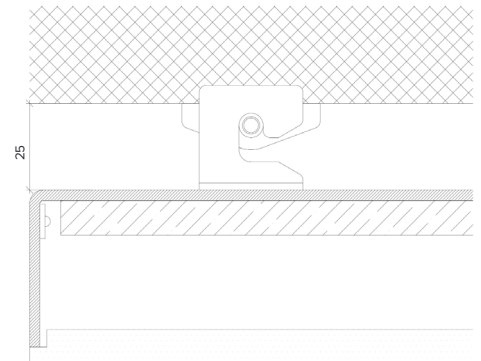


The Light Lab
22 Holywell Row
London EC2A 4JB
+44 (0) 207 278 2678
@thelightlabltd
www.thelightlab.com

the light lab
bright ideas


Product Details Glowpanel Trimless 65



X Section
IP40



IP65



Specification

| | | |
|-------------------------|--|--------------------|
| Output | SO | HO |
| Power Consumption | 40W/m ² | 80W/m ² |
| Voltage | 24VDC | 24VDC |
| IP Rating | IP40 or IP65 | IP40 or IP65 |
| LED Colour ¹ | 2.0K/3.0K/4.0K/5.0K, RGBW or WWCW (White Mix 2.7K - 6.5K) | |
| Dimensions: | Width | 1500mm (max) |
| | Length | 3000mm (max) |
| | Depth ² | 65mm |
| Mount Type ³ | Surface (SM), Recessed Wall (RE), Wall (WA) or Ceiling (CE) | |
| Finish | White (WH) or Custom RAL (RAL) | |
| Control | 0-10V/1-10V/DMX/DALI/SPI | |

Notes

- 1 Other colours available on request.
- 2 Depth excludes grommet, glands & cables.
- 3 Special mechanical consideration is required for ceiling applications.


Order code

Glowpanel Trimless 65- Output-IP Rating-LED Colour-Mount Type-Frame Finish-
Length x Width(mm)- Dimming


Example code: Glowpanel Trimless 65-SO-IP40-3.0K-SM-BR-1200x300-DALI

Description: Glowpanel Trimless 65, standard output, IP40, 24VDC constant voltage
LED with 3000K colour temperature. Surface mounted with powder coated chassis.
Overall dimensions = 1200x3000mm. DALI dimmable.

Wall Fixing

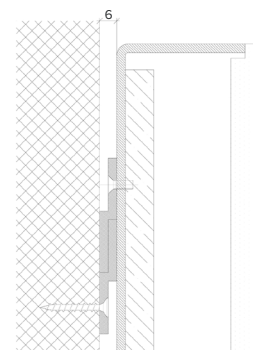

Ceiling Fixing

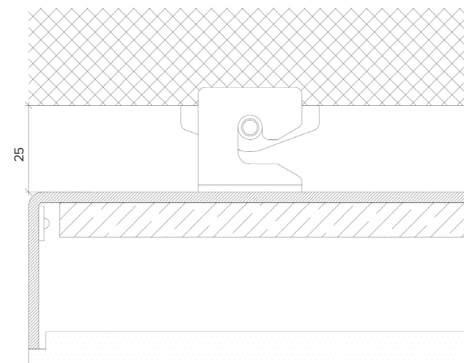

The Light Lab
22 Holywell Row
London EC2A 4JB
+44 (0) 207 278 2678
@thelightlabltd
www.thelightlab.com

the light lab
bright ideas