

# Product Details Glowpanel Trimless 35



## Specification

Output	SO	HO
Power Consumption	average 56W/m <sup>2</sup>	average 76W/m <sup>2</sup>
Voltage	24VDC	24VDC
IP Rating	IP40 or IP65	IP40 or IP65
LED Colour <sup>1</sup>	2.0K/3.0K/4.0K/5.0K, RGBW or WWCW (White Mix 2.7K - 6.5K)	
Dimensions:	1500mm (max)	
Width	3000mm (max)	
Length	35mm	
Depth <sup>2</sup>		
Mount Type <sup>3</sup>	Surface (SM), Recessed Wall (RE), Wall (WA) or Ceiling (CE)	
Finish	White (WH) or Custom RAL (RAL)	
Control	0-10V/1-10V/DMX/DALI/SPI	

### Notes

- 1 Other colours available on request.
- 2 Depth excludes grommet, glands & cables.
- 3 Special mechanical consideration is required for ceiling applications.

### Order code

Glowpanel Trimless 35- Output-IP Rating-LED Colour-Mount Type-Frame Finish- Length x Width(mm)- Dimming


**Example code: Glowpanel Trimless 35-SO-IP40-3.0K-SM-BR-1200x300-DALI**

Description: Glowpanel Trimless 35, standard output, IP40, 24VDC constant voltage LED with 3000K colour temperature. Surface mounted with powder coated chassis. Overall dimensions = 1200x3000 mm. DALI dimmable.




### X Section


IP40

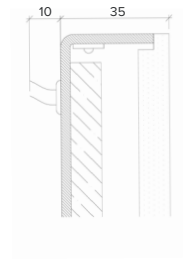


IP65



### Wall Fixing



### Ceiling Fixing

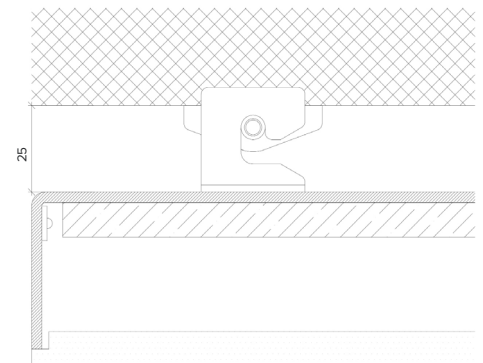

The Light Lab  
22 Holywell Row  
London EC2A 4JB  
+44 (0) 207 278 2678  
@thelightlabltd  
www.thelightlab.com

**the light lab**  
bright ideas

# Product Details Glowpanel Trimless 65



## Specification

Output	SO	HO
Power Consumption	40W/m <sup>2</sup>	80W/m <sup>2</sup>
Voltage	24VDC	24VDC
IP Rating	IP40 or IP65	IP40 or IP65
LED Colour <sup>1</sup>	2.0K/3.0K/4.0K/5.0K, RGBW or WWCW (White Mix 2.7K - 6.5K)	
Dimensions:	Width	1500mm (max)
	Length	3000mm (max)
	Depth <sup>2</sup>	65mm
Mount Type <sup>3</sup>	Surface (SM), Recessed Wall (RE), Wall (WA) or Ceiling (CE)	
Finish	White (WH) or Custom RAL (RAL)	
Control	0-10V/1-10V/DMX/DALI/SPI	

### Notes

- 1 Other colours available on request.
- 2 Depth excludes grommet, glands & cables.
- 3 Special mechanical consideration is required for ceiling applications.

### Order code

Glowpanel Trimless 65- Output-IP Rating-LED Colour-Mount Type-Frame Finish- Length x Width(mm)- Dimming


Example code: Glowpanel Trimless 65-SO-IP40-3.0K-SM-BR-1200x300-DALI

Description: Glowpanel Trimless 65, standard output, IP40, 24VDC constant voltage LED with 3000K colour temperature. Surface mounted with powder coated chassis. Overall dimensions = 1200x3000mm. DALI dimmable.




### X Section


IP40




IP65



### Wall Fixing



### Ceiling Fixing

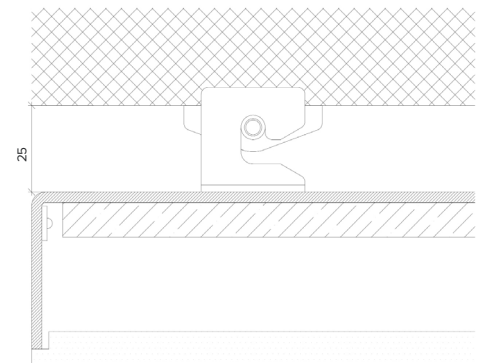

The Light Lab  
22 Holywell Row  
London EC2A 4JB  
+44 (0) 207 278 2678  
@thelightlabltd  
www.thelightlab.com

**the light lab**  
bright ideas