

Product Details Glowpanel Trimless 35



Specification

Output	SO	HO
Power Consumption	average 56W/m ²	average 76W/m ²
Voltage	24VDC	24VDC
IP Rating	IP40 or IP65	IP40 or IP65
LED Colour ¹	2.0K/3.0K/4.0K/5.0K, RGBW or WWCW (White Mix 2.7K - 6.5K)	
Dimensions:	1500mm (max)	
Width	3000mm (max)	
Length	35mm	
Depth ²		
Mount Type ³	Surface (SM), Recessed Wall (RE), Wall (WA) or Ceiling (CE)	
Finish	White (WH) or Custom RAL (RAL)	
Control	0-10V/1-10V/DMX/DALI/SPI	

Notes

- 1 Other colours available on request.
- 2 Depth excludes grommet, glands & cables.
- 3 Special mechanical consideration is required for ceiling applications.

Order code

Glowpanel Trimless 35- Output-IP Rating-LED Colour-Mount Type-Frame Finish-
Length x Width(mm)- Dimming


Example code: Glowpanel Trimless 35-SO-IP40-3.0K-SM-BR-1200x300-DALI

Description: Glowpanel Trimless 35, standard output, IP40, 24VDC constant voltage LED with 3000K colour temperature. Surface mounted with powder coated chassis. Overall dimensions = 1200x3000 mm. DALI dimmable.




X Section


IP40

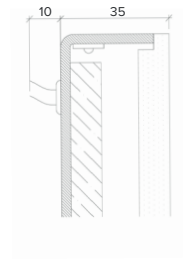


IP65



Wall Fixing

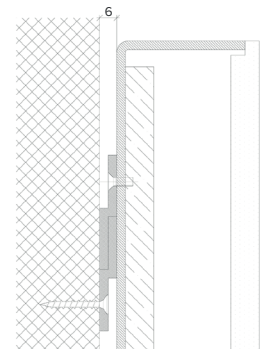

Ceiling Fixing

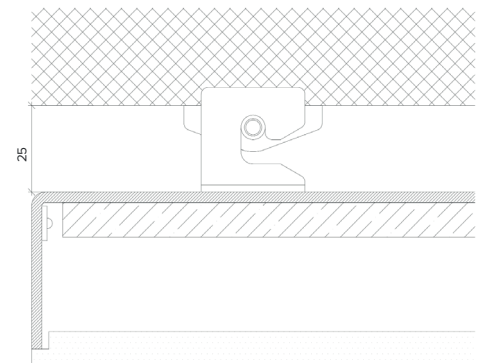

The Light Lab
22 Holywell Row
London EC2A 4JB
+44 (0) 207 278 2678
@thelightlabltd
www.thelightlab.com

the light lab
bright ideas

Product Details Glowpanel Trimless 65



Specification

Output	SO	HO
Power Consumption	40W/m ²	80W/m ²
Voltage	24VDC	24VDC
IP Rating	IP40 or IP65	IP40 or IP65
LED Colour ¹	2.0K/3.0K/4.0K/5.0K, RGBW or WWCW (White Mix 2.7K - 6.5K)	
Dimensions:	Width	1500mm (max)
	Length	3000mm (max)
	Depth ²	65mm
Mount Type ³	Surface (SM), Recessed Wall (RE), Wall (WA) or Ceiling (CE)	
Finish	White (WH) or Custom RAL (RAL)	
Control	0-10V/1-10V/DMX/DALI/SPI	

Notes

- 1 Other colours available on request.
- 2 Depth excludes grommet, glands & cables.
- 3 Special mechanical consideration is required for ceiling applications.

Order code

Glowpanel Trimless 65- Output-IP Rating-LED Colour-Mount Type-Frame Finish-
Length x Width(mm)- Dimming


Example code: Glowpanel Trimless 65-SO-IP40-3.0K-SM-BR-1200x300-DALI

Description: Glowpanel Trimless 65, standard output, IP40, 24VDC constant voltage LED with 3000K colour temperature. Surface mounted with powder coated chassis. Overall dimensions = 1200x3000mm. DALI dimmable.




X Section


IP40




IP65

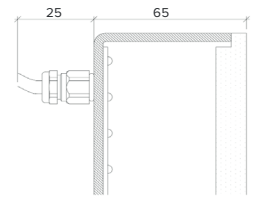

Wall Fixing

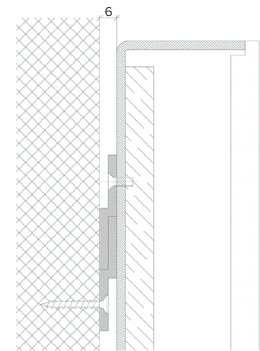

Ceiling Fixing

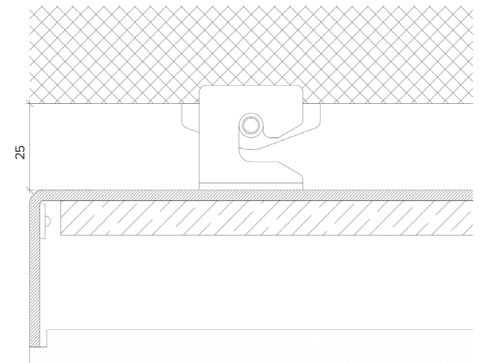

The Light Lab
22 Holywell Row
London EC2A 4JB
+44 (0) 207 278 2678
@thelightlabltd
www.thelightlab.com

the light lab
bright ideas