

# Product Details: LinLED-PROFILE-IP65



## Specification

	HO	RGB
Length	Min 55mm up to 1955mm in 50mm increments	Min 55mm up to 1955mm in 50mm increments
Colour	2.7K/3.0K/3.5K/4.0K/5.0K	RGB/RGBCW/RGBWW
Input Voltage	24Vdc	12Vdc
Power Consumption	14W/m	14W/m
Luminaire Efficiency	110 lm/W	N/A
IP Rating	IP44	IP44
Diffuser	Clear	Clear
Clip	Fixed	Fixed
Cable Exit	Rear or End	Rear or End

### Order code

LinLED PROFILE IP65-LENGTH-OUTPUT-COLOUR-IP-DIFFUSER-CLIP-CABLE EXIT  
 e.g. LED PROFILE IP65-XXmm-HO-3.0K-14W/m-110lm/W-IP44-CLEAR-FIXED-REAR

LENGTH - OUTPUT - COLOUR - IP - DIFFUSER - CLIP - CABLE EXIT
XXmm HO 2.7K IP44 CLEAR FIXED REAR
RGB 3.0K ADJ END
3.5K
4.0K
5.0K
RGB
RGBCW
RGBWW

### Drivers

non-dimmable power supplies:



1-10V /DALI/DMX dimmable power supplies to be ordered seperately

Please call our sales team who will make sure specification suits application



Linear LED Lighting by The Light Lab



## X-Sections



## Project Example

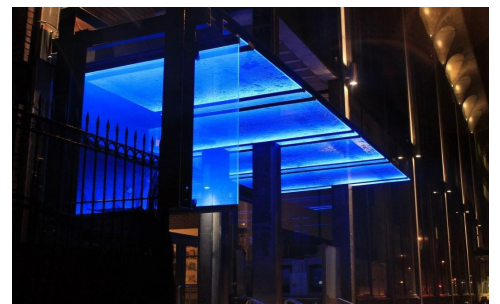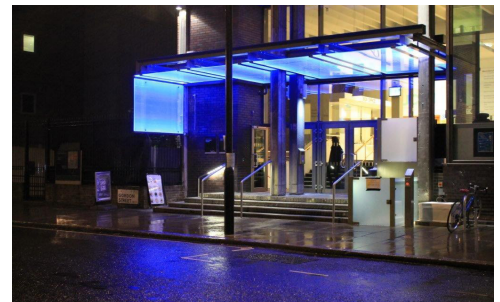

The Light Lab  
 22 Holywell Row  
 London EC2A 4JB  
 United Kingdom  
 +44 (0) 207 278 2678  
 @thelightlabtd  
 www.thelightlab.com