

# Product Details: LinLED-COVE



## Specification

	HO	SHO	WMIX
Length	90mm min + 83mm increments	90mm + 83mm increments	180mm + 167mm increments
Colour	2.3K/2.7K/3.0K/ 3.5K/3.5K/4.0K/ 5.0K	2.3K/2.7K/3.0K/ 3.5K/3.5K/4.0K/ 5.0K	2.7K/5.3K White Mix
Input Voltage	24Vdc	24Vdc	24Vdc
Power Consumption	19.5 W/m	37 W/m	19.5 W/m
Luminaire Efficiency	127 lm/W	125 lm/W	125 lm/W
IP Rating	IP44	IP44	IP44
Diffuser	Frosted	Frosted	Frosted
Clip	Round plastic	Round Plastic	Round plastic

### Order code

LED COVE-LENGTH-OUTPUT-COLOUR-IP-DIFFUSER-CLIP  
e.g. LED COVE-XXmm-SHO-2.3K-IP44-FROSTED-RP

LENGTH - OUTPUT - COLOUR - IP - DIFFUSER - CLIP

XXmm	SHO	2.3K	IP44	Frosted	RP
	WMIX	2.7K			
		3.0K			
		3.5K			
		4.0K			
		5.0K			
		5.3K			

### Drivers

non-dimmable power supplies:


1-10V /DALI/DMX dimmable power supplies to be ordered separately

Please call our sales team who will make sure specification suits application

Linear LED Lighting by The Light Lab




## X-Sections

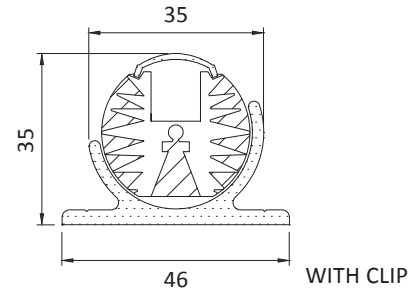

## Project Example



## Photometric Info

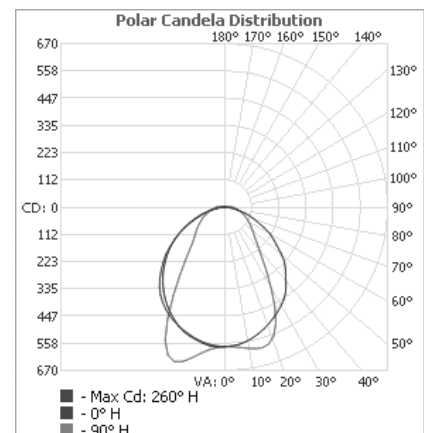

The Light Lab  
22 Holywell Row  
London EC2A 4JB  
United Kingdom  
+44 (0) 207 278 2678  
@thelightlabtd  
www.thelightlab.com